

March 23, 2020

*MIDDLETON ASSOCIATES INCORPORATED
1702 W. COLLEGE AVE., SUITE E
NORMAL, IL 61761-2793
309/452-1271 FAX 309/454-8049*

ADDENDUM NUMBER 1
TO THE DRAWINGS AND SPECIFICATIONS

PROJECT: McLean County Unit District No. 5 Parking Lot and Driveway Repairs at 2 Locations

FOR: McLean Co. Unit District No. 5
1809 W. Hovey Ave.
Normal, IL 61761

A/E PROJECT NO: 24732319 (Normal Community West High School)
24902319 (Pepper Ridge Elementary School)

ISSUE DATE: March 3, 2020

BID OPENING: Thursday, April 2, 2020, 10:00 a.m. prevailing time
Maintenance Office, 1999 Eagle Road, Normal, IL 61761

Upon receipt of this ADDENDUM, insert same into the documents, which were issued to you. Hereafter, said ADDENDUM shall be as much a part of the said documents as though originally set forth therein.


1. TO THE SPECIFICATIONS: Section 00040; Instructions for Bidders: Paragraph 1.22.D: Add subparagraph 1: The cost breakdown and Pay Request must separate the cost for each school (labor and material, and O&P), so that the payment can be made from the appropriate amendment.
2. TO THE DRAWINGS: Pepper Ridge Elementary School, Job # 24902319: Sheet C-1.0 will have curb and gutter added and the rip rap may be deleted except for two cubic yards at the point of drainage at the northeast corner. At the north 22', install a laydown at 20' to the corner; then south 28' then eliminate the curve going straight 28' at about 30°; then straight south 25'; then form at 45° corner and install 10' of curb and gutter; then 38' to the existing sidewalk. The drawing actually shows a double line which was intended to be curb and gutter – the curves can be made straight.
3. TO THE DRAWINGS: Pepper Ridge Elementary School, Job # 24902319: Sheet C-1 photo 24; the width of this repair will be increased from 11' to 12'; then for the 148' length mil 3" rather than 2" and install 3" of new asphalt at the west edge of the 148' and install 4" at the sidewalk curb.
4. TO THE DRAWINGS: Pepper Ridge Elementary School, Job # 24902319: Sheet C-1: The dark double line at the south edge indicates a curb and gutter same dimension as item 2 above. Install a 3' laydown curb 24' from south edge of sidewalk. Install 2 ½ cubic yards of rip rap at the laydown.

5. TO THE SPECIFICATIONS: Section 32120; Paving: Paragraph 3.2.A; Pepper Ridge Elementary Parking Area A should be Area 1. The area change to 407 sq. yds., not 338 sq. yds. Paragraph 3.2.C: South parking lot Area A, change area to 910 sq. yds, not 490 sq. yds.

6. TO THE SPECIFICATIONS: Section 32120; Paving: Paragraph 3.1; Parking and Lane Drive Normal Community West High School; make the following changes: Paragraph 3.1.A should be 1389 sq. yds, not 778 sq. yds.; Paragraph 3.1.B Area 2 should be 118 sq. yds., not 98 sq. yds.; Paragraph 3.1.D Area A should be 901 sq. yds., not 1033 sq. yds.; Paragraph 3.1.E Area 5 should be 47 sq. yds., not 110 sq. yds.; Paragraph F Area 6 should be 149 sq. yds., not 113 sq. yds.

ATTACHMENT: Sheet C-2: Curb Detail Addendum No. 1

END ADDENDUM NO. 1

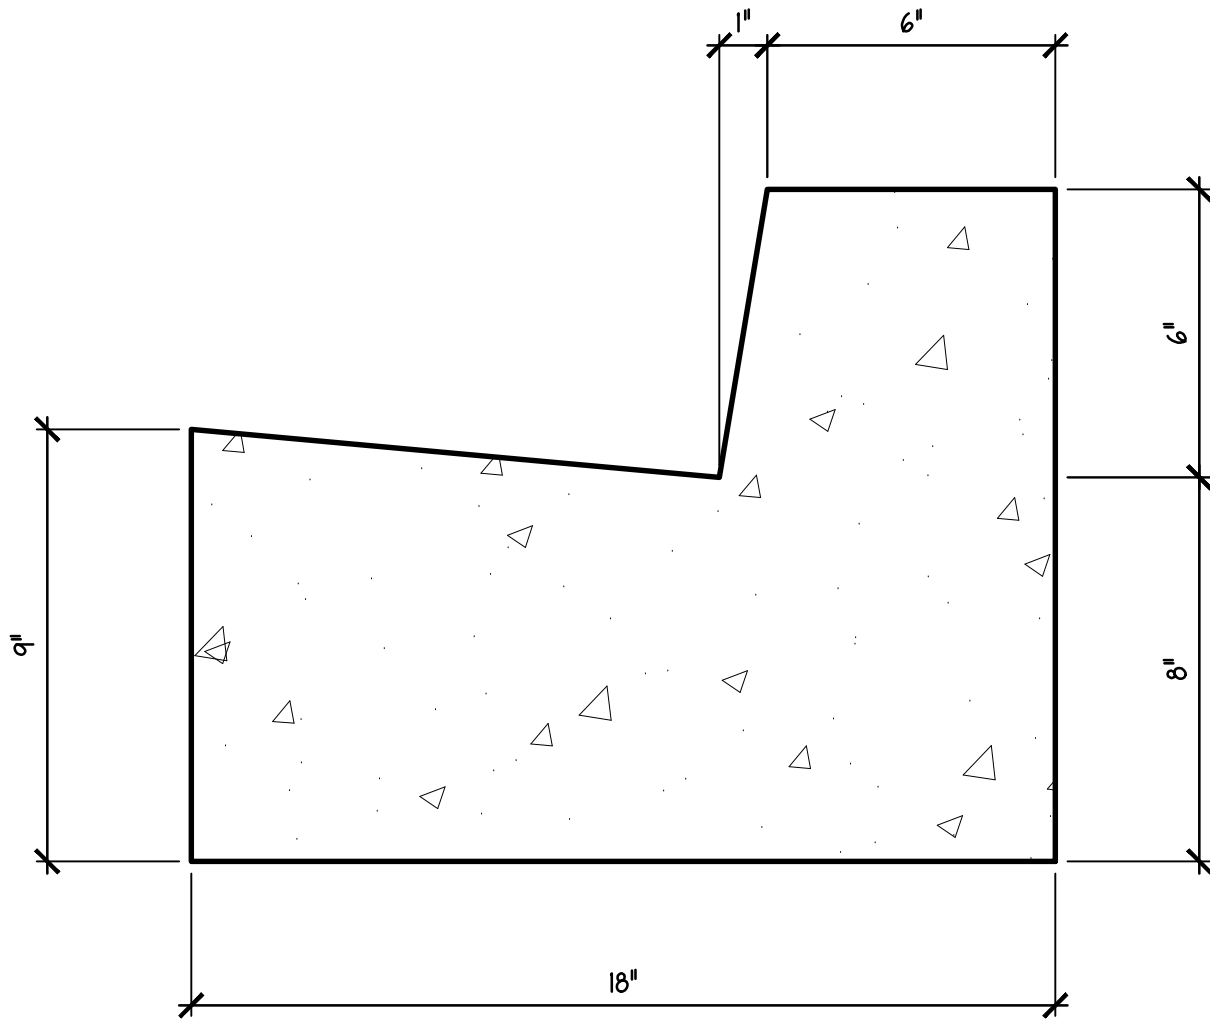

PARKING LOT & DRIVEWAY REPAIRS

PEPPER RIDGE ELEMENTARY / N.C.W.H.S.

PROJECT NO.
2473_2490 2319

ISSUE DATE
MARCH 23, 2020

SHEET
C2
OF 1 SHEETS

REMARKS

ADDENDUM NO.1

MIDDLETON
ASSOCIATES • INC
ARCHITECTS

1702 W. College Ave.
Suite E
Normal, IL 61761-2793
p: 309.452.1271
f: 309.454.8049
middletonassociates.net

THE CONTRACTOR SHALL VERIFY CONDITIONS & DIMENSIONS ON THE JOB. INFORMATION SHOWN ON ANY PART OF THE DRAWINGS SHALL APPLY TO SIMILAR CONDITIONS AT OTHER LOCATIONS IN THE WORK UNLESS SET FORTH OTHERWISE