


CAPACITY 1173
 SEATING 1167
 5 12
 (BAND SPACE TAKES 22)


BASE BID - HOME GRANDSTAND

SCALE 1/8" = 1'-0" 0' 1/8" 8'

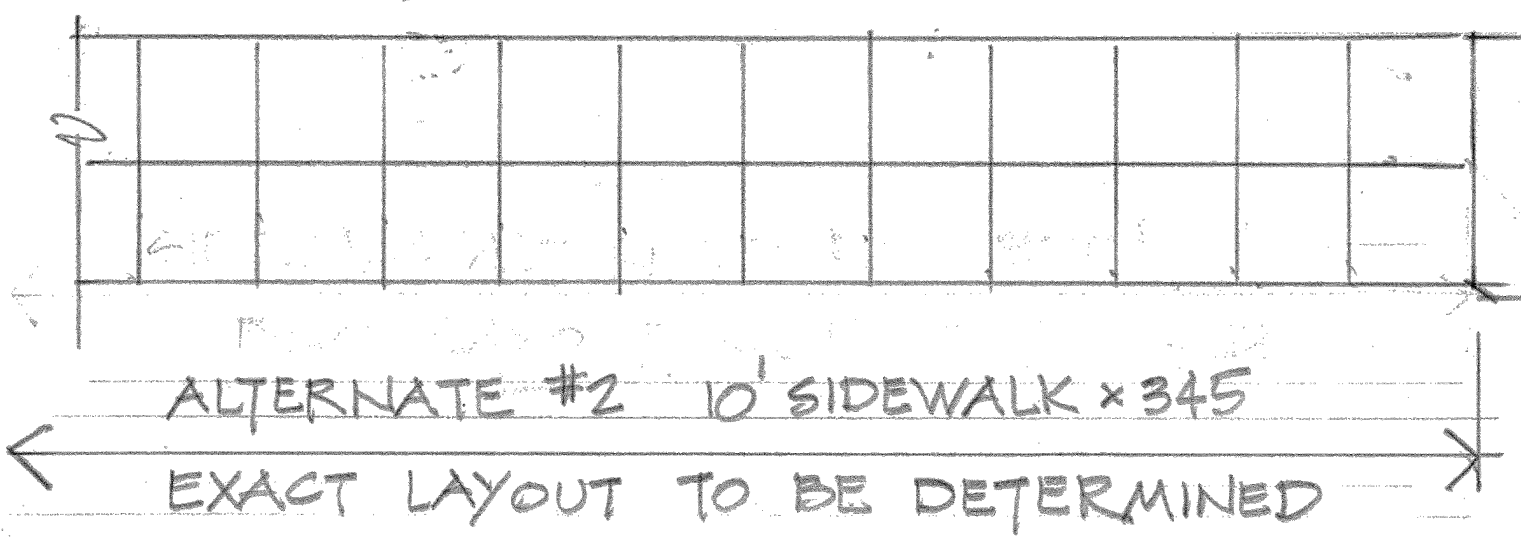

Concrete structural slab to support structure. Concrete to be IDOT approved mix, no fly ash, 1 1/2 pound macro fiber per cubic yard. Slab to have perimeter trenched foundation 8" x 36" deep minimum, with (2) # 6 top and (2) # 6 bottom to form grade beam, lap not less than 20". Slab to be thickened to minimum 16" at column bearings, with 4' x 4' # 4 bar mat spaced at 8". Slab to be scored uniformly between columns at approximately 18" maximum spacings, 12' minimum. Construction joints if occur to be thickened to 6" and 1/2" x 12" smooth greased dowels at 12" spacing. Concrete to be exterior mix, 4000 psi with nominal 7% air entrainment, no fly ash. Slab to be smooth float finish, suitable for use as enclosed storage area floor in the future. Slope approximately 1/2% to south to drain.

Alternate Sidewalk to parking lot to be 4' x 5', score at 5' macro mesh 4000 psi macro fiber concrete.

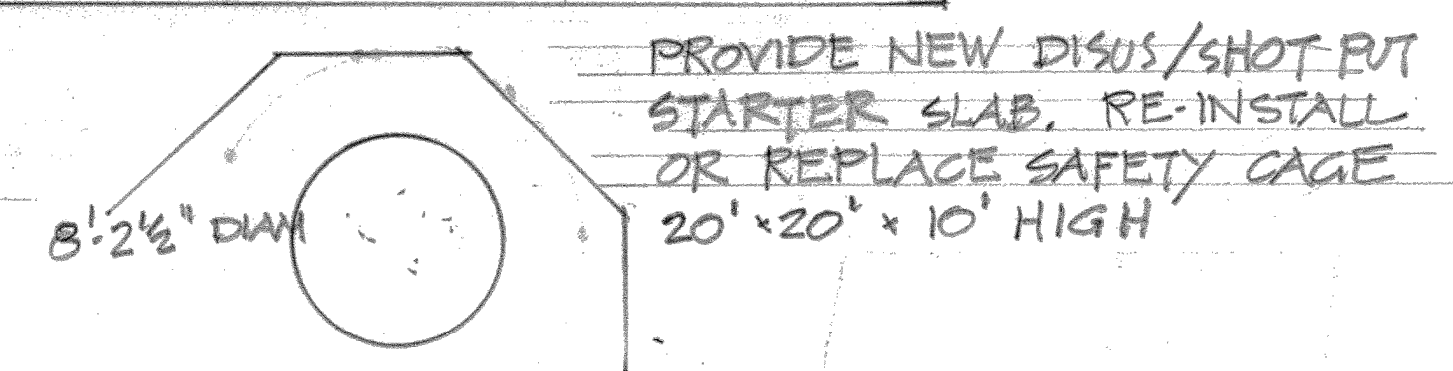

1702 W. College Ave.
 Suite E
 Normal, IL 61761-2793
 p: 309.452.1271
 f: 309.454.8049
 middletonassociates.net


MIDDLETON ASSOCIATES, INC ARCHITECTS

PRAIRIE CENTRAL HIGH SCHOOL FOOTBALL SEATING
 411 N. 7th Street - Fairbury, IL 61739
 for Prairie Central CUSD No. 8
 411 N. 7th Street
 Fairbury, IL 61739

BASE BID HOME GRANDSTAND

NO.	DATE	REVISIONS	REMARKS

PROJECT NO. 25060319
 ISSUE DATE FEBRUARY 4, 2020
 SHEET 1
 OF 3 SHEETS

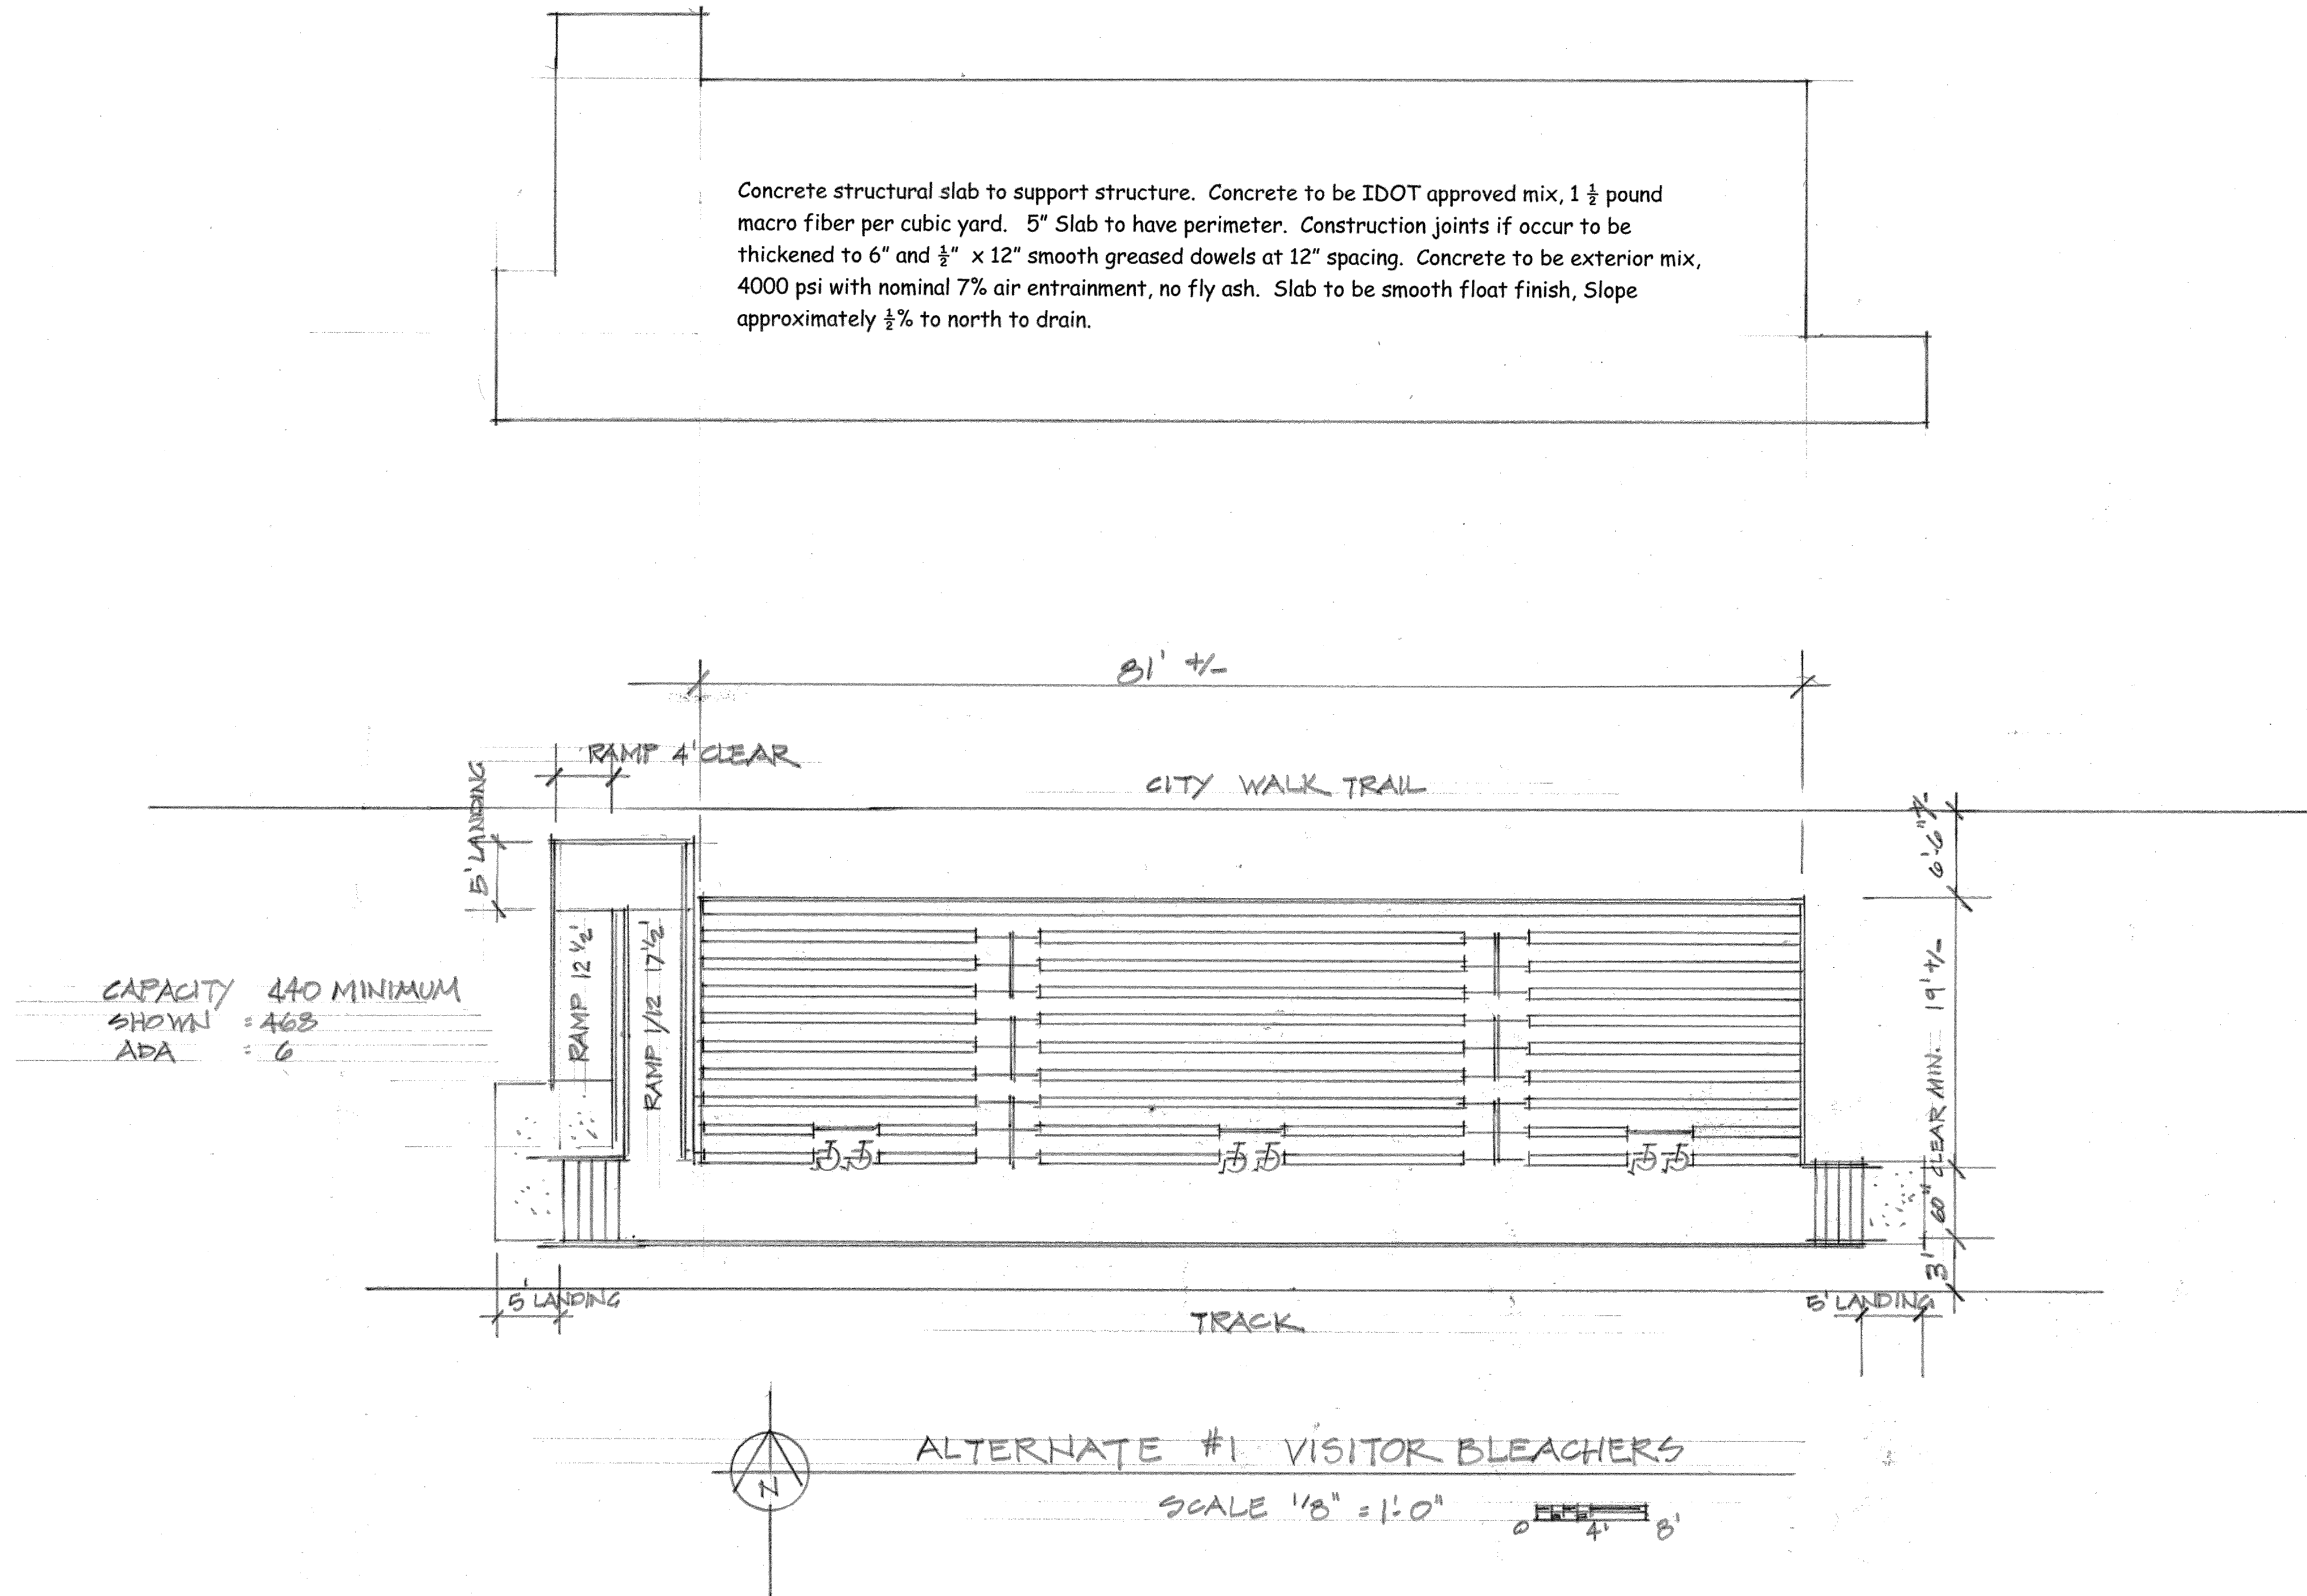

NO.	DATE	REMARKS